

Compact TOUCHLOCK keypad - K38/K50/K75/K75 screw connector

System specifications

Number of PINs 50

Door open time 1 sec - 60 secs

Readers per door 1

Exit button input Yes

Silent operation Yes

Bell button output Yes

Data retention during a total power loss >10 years

Electrical

Operating Voltage 11V - 14V DC

Current consumption 170mA

12V DC lock output 750mA @ 12V

Environment

Operating Temperature -20°C - +55°C
-4°F - +131°F

Moisture resistance IPX7
(Screw connector - No)

Vandal Resistance Medium



The compact K38/K50/K75/K75 screw connector Keypads are devices that offer the simplicity of PIN or Code authentication for system users.


All compacts are standalone, meaning that they do not use a PC in their set up. The Compact products are a control unit and reader in one; they are great for lower security internal and external doors that need to have restricted access.

The readers are supplied with a choice of black or white covers/bezels.


The 75 Series variant is also optionally available with a screw connector version making cabling even simpler.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes. If access is denied, the red LED flashes! An audible tone is emitted in both cases.


K38

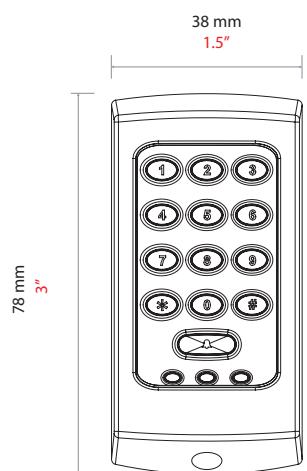


K50

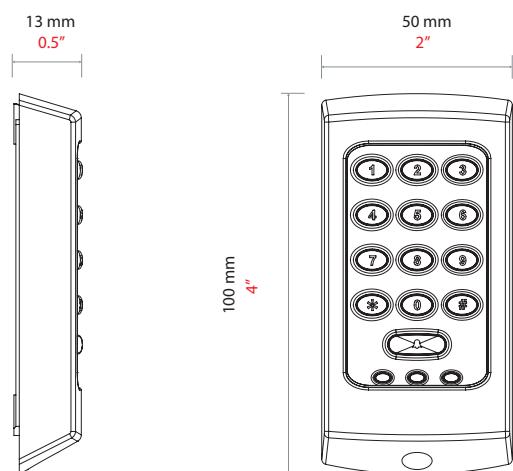

K75

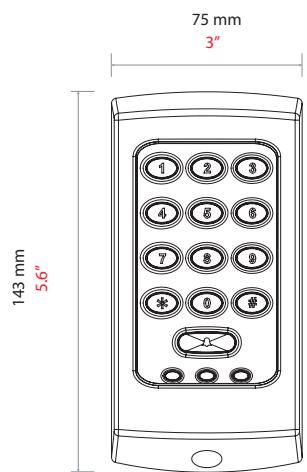

K75sc

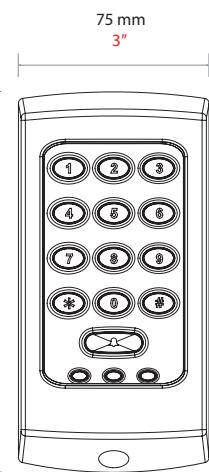

Accessories and sales codes

Compact TOUCHLOCK keypad - K75

371-210-US

Compact TOUCHLOCK keypad - K50

351-210-US